Thank you for purchasing our product.
Please read this User's Manual before
using the product. Change without notice

17" & 19" Glass TFT LCD MONITOR

USER MANUAL

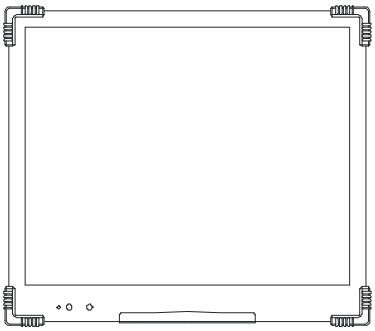

WARNING:

TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS PRODUCT TO RAIN OR MOISTURE.

DO NOT INSERT ANY METALLIC OBJECT THROUGH VENTILATION GRILLS.

CAUTION:

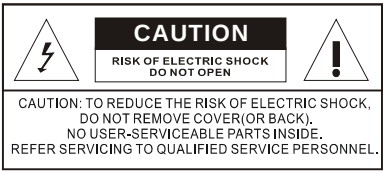
CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN
CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK,
DO NOT REMOVE COVER(OR BACK).
NO USER-SERVICEABLE PARTS INSIDE.
REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

Explanation of Graphical Symbols

The lightning flash with arrowhead symbol, within an equilateral triangle, is intended.to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.

The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the product.

Important Information

IMPORTANT SAFEGUARDS

1. READ INSTRUCTIONS

All the safety and operating instructions should be read before the unit is operated.

2. RETAIN INSTRUCTIONS

The safety and operating instructions should be retained for future reference.

3. HEED WARNINGS

All warnings on the unit and in the operating instructions should be adhered to.

4. FOLLOW INSTRUCTIONS

All operating and usage instructions should be followed.

5. CLEANING

Unplug this unit from the wall outlet before cleaning. Do not use liquid cleaners or aerosol cleaners. Clean only with a dry cloth.

6. ATTACHMENTS

The manufacturer of this unit does not make any recommendations for attachments, as they may cause hazards.

7. WATER AND MOISTURE

Do not use this unit near water. For example, near a bathtub, washbowl, kitchen sink, laundry tub, in a wet basement, or near a swimming pool.

8. ACCESSORIES

Do not place this unit on an unstable cart, stand, tripod, bracket, or table. The unit may fall, causing serious injury, and serious damage to the unit. An appliance and cart combination should be moved with care. Quick stops, excessive force, and uneven surfaces may cause the appliance and cart combination to overturn.

9. VENTILATION

Slots and openings at the rear cabinet and bottom are provided for ventilation, these are to ensure reliable operation of the unit, and to protect it from overheating. These openings must not be blocked or covered. The openings should never be blocked by placing the unit on a bed, sofa, rug, or other similar surface. This unit should never be placed near or over a radiator or heat source. This unit should not be placed in a built-in installation such as a bookcase or rack unless proper ventilation is provided or the manufacturer's instructions have been adhered to.

10. POWER SOURCE

This unit should be operated only from the type of power source indicated on the rating plate. If you are not sure of the type of power supply to your home, consult your appliance dealer or local power company.

11. POWER-CORD PROTECTION

Power-supply cords should be routed so that they are not likely to be walked on or pinched by items placed upon or against them, paying particular attention to cords at plugs, convenience receptacles, and the point where they exit from the appliance.

12. LIGHTNING

To protect your unit from a lightning storm, or when it is left unattended and unused for long periods of time, unplug it from the wall outlet and disconnect the antenna or cable system. This will prevent damage to the unit due to lightning and power line surges.

13. POWER LINES

An outside antenna system should not be located in the vicinity of overhead power lines or other electric light or power circuits, or where it can fall onto or against such power lines or circuits. When installing an outside antenna system, extreme care should be taken to keep from touching such power lines or circuits, as contact with them might be fatal.

14. OVERLOADING

Do not overload wall outlets and extension cords, as this can result in a risk of fire or electric shock.

15. OBJECT AND LIQUID ENTRY

Do not push objects through any openings in this unit, as they may touch dangerous voltage points or short out parts that could result in fire or electric shock. Never spill or spray any type of liquid into the unit.

16. HEAT

The product should be situated away from heat sources such as radiators, heat registers, stoves, or other products (including amplifiers) that produce heat.

17. CONNECTING

When you connect the product to other equipment, turn off the power and unplug all of the equipment from the wall outlet. Failure to do so may cause a product damage. Read the owner's manual of the other equipment carefully and follow the instructions when making any connections.

18. LCD

Do not press on or jolt the LCD panel. Doing so may cause the LCD panel glass to break and injury may occur. Should the LCD panel be broken and liquid leaks out, do not inhale or swallow it. Doing so may cause poisoning. If you have got it into your mouth, wash it out and consult your doctor. If your hands or clothes have touched it, wipe them with alcohol and a cleaning cloth and then wash them well.

Safety Precautions

Federal Communications Commission (FCC) Statement

This Equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-Reorient or relocate the receiving antenna.

-Increase the separation between the equipment and receiver.

-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-Consult the dealer or an experienced radio/TV technician for help.

- You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

This device complies with Part 15 FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received including interference that may cause undesired operation

Table of Contents

Warning…… 2
Important Information…… 3
Safety Precautions……4
Table of Contents…… 5
Components…… 5
Feature…… 6
Exploring Your New Monitor……7
Backside Connections…… 8
Connecting your Monitor……9
Connecting Device…… 10
Setup your Monitor……11
Remote Control……12
General Setup…… 14
Video Setup…… 15
VGA Setup……16
Audio Setup…… 17
PIP Setup…… 18
LCD Monitor Mounting Guide……19
Desktop…… 19
Mounting the monitor on the rack……19
Arm Mount (VESA standard)…… 19
Troubleshooting…… 20
LCD Color Monitor Specifications…… 21
LCD Color Monitor Dimensions …… 22

Components

(1)	LCD Color Monitor	1
(2)	Accessories	
	(a) Power cord	1
	(b) User Manual	1
	(c) Remote Control	1

Feature

■Professional TFT LCD for surveillance in 17” and 19” with multiple connection.

■Compatible with VGA(640X480), SVGA(800X600), XGA(1024X768), SXGA(1280X1024) resolution,

■Picture-In-Picture feature that allow multi-picture display

■High brightness level and contrast ration with super wide viewing angle

■Built-in 3D comb filter and 3D de-interlace for crispy picture performance

■Fast response time and refresh rate without time lagging.

■Provides 6500° K and 9300° K color temperature selection for user’s preference

■Video inputs support NTSC / PAL standards

■Provides Key Lock and power memory function for easy management

■CCD mode control that enable auto-adjust incoming video signal level

■Video looping output supports 75ohm auto termination

■Support audio and live-out function with stereo phone jack output

■VESA standards (100mm X 100mm) bracket

■Optional rack mount bracket for 19” rack console (Tiltable style)

Exploring Your New Monitor

You can operate your monitor by using the buttons on the front panel. The side panels provide the inputs to connect other equipment to your monitor.

Front Panel

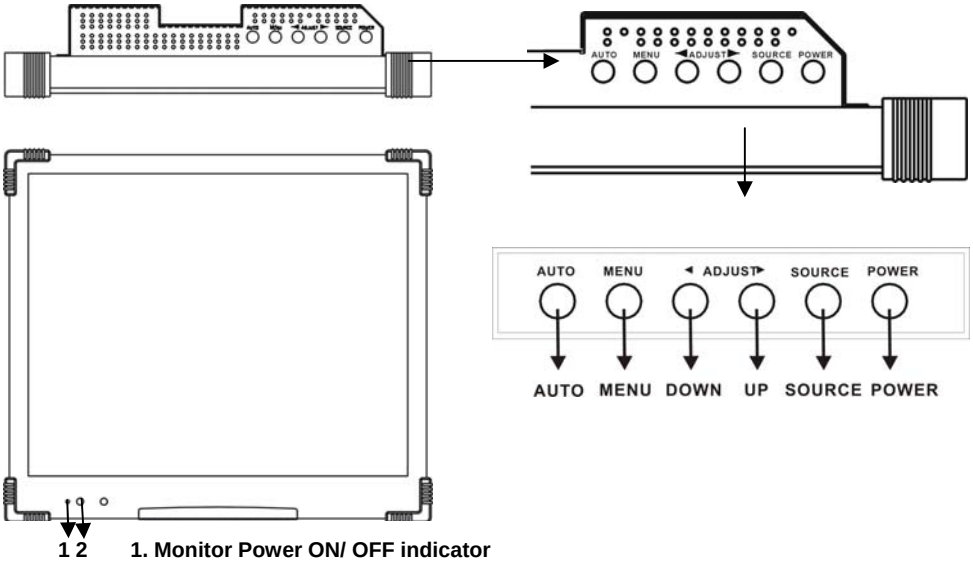

1. Monitor Power ON/ OFF indicator
2. Receiver: Remote control IR sensor

Back

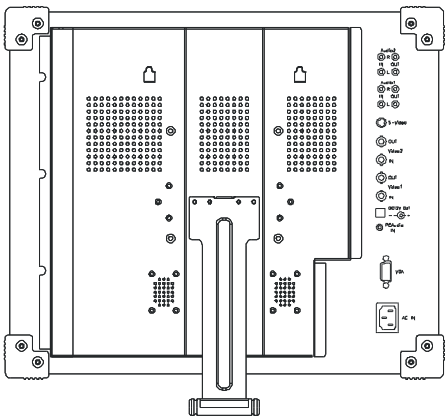

Side



Backside Connections

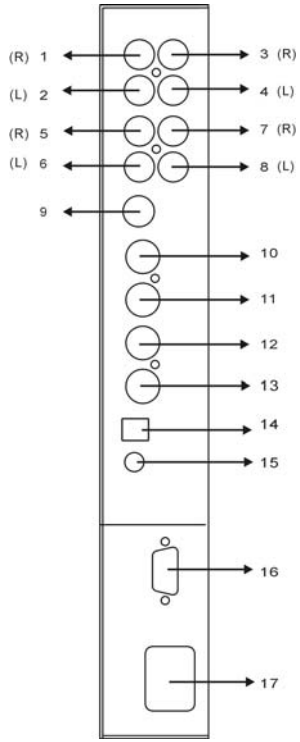

1, 2 **AUDIO 2 IN (R, L)**
Stereo Audio Signal Input, this input is for AV2 (Refer to Note below)

3, 4 **AUDIO 2 OUT (R, L)**
Audio looping outputs for AUDIO 2

5, 6 **AUDIO 1 IN (R, L)**
Stereo Audio Signal Input, this input is for AV1 or S-Video (Refer to Note below)

7, 8 **AUDIO 1 OUT (R, L)**
Audio looping outputs for AUDIO 1

9 **S-VIDEO IN**
Y/C separated signal input

10 **VIDEO 2 OUT**
Video looping output for VIDEO 2

11 **VIDEO 2 IN**
Composite signal Input for VIDEO 2

12 **VIDEO 1 OUT**
Video looping output for VIDEO 1

13 **VIDEO 1 IN**
Composite signal Input for VIDEO 1

14 DC12V OUT **DC OUTPUT**
– + DC 12V / 500mA power output (Supporting for PVM unit)

15. **PC AUDIO IN**

16 **VGA IN**

17. **AC POWER SOCKET**
AC100V~240V Input

Note: Connections of Audio

	Audio 1	Audio 2	PC Audio
PC			ˇ
AV1	ˇ		
AV2		ˇ	
S-Video	ˇ		

Connecting your Monitor

If you don't have experience in electronic equipment connection before, you may wish to read this section. (Cables are not supplied, just for reference)

- Audio cables are usually color coded according to use: red and white for audio. The red audio cable is for the stereo right channel, and the white audio cable is for the stereo left (or mono) channel. If you look at the rear panel of the Monitor, you will see that the terminals are color coded in the same manner as the cables.
- S-video cables provide better picture performance than standard video cables. S-video cables can only be used with S-video compatible components.
- **BNC cable provides better connection and picture performance.**

.



RCA Audio Cable

S-Video Connector

BNC Connector

PC Audio Connector

VGA Connector

NOTE:
To prevent equipment damage,
Do not plug in any power cords until you have finished connecting all equipment.

Connecting Device

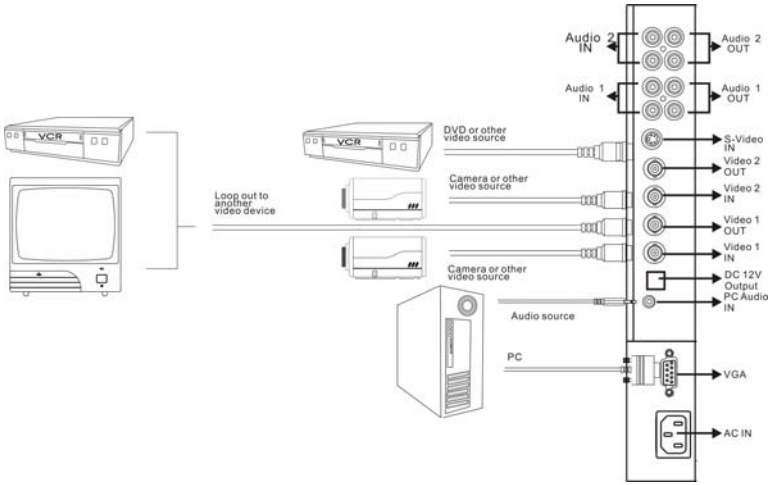

a. Connect PC to Monitor through VGA connector as shown on the above picture
b. Connect External device such as DVD or Game Player to Monitor as shown on the above picture
c. Connect CCD Camera 1 and 2 to Monitor through Video Input 1 and 2 (BNC Connector) as showing on the above picture
d. Support Resolution

17" Monitor Display modes

Mode	Resolution	Refresh rate
VGA	640x480	up to 75Hz
SVGA	800x600	up to 75Hz
XGA	1024x768	up to 75Hz
SXGA	1280x1024	up to 75Hz

19" Monitor Display modes

Mode	Resolution	Refresh rate
VGA	640x480	up to 75Hz
SVGA	800x600	up to 75Hz
XGA	1024x768	up to 75Hz
SXGA	1280x1024	up to 75Hz

Although this Monitor supports above RGB signals, any resolutions not matched by this Monitor (SXGA) will be expanded or shrunk, which will affect image quality.
To view high-quality images, it is recommended that the PC's resolution should be set to SXGA (1280x1024) resolution.

Setup your Monitor

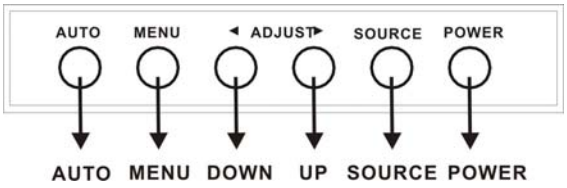

AUTO: Auto-optimize displaying picture under PC mode.
Enter: This " Auto" Button can be either "Enter" function in OSD Menu)
CCD Mode: Under AV/1 / AV2 / S-Video press **Auto** can be changed to CCD/Video mode toggle.

MENU: OSD menu ON / OFF control.
(EXIT Item)

ADJUST: Increase or decrease the value on OSD menu.
▶ **Up**: Increase value or turn ON / OFF function.
◀ **Down:** Decrease value or turn ON / OFF function

SOURCE: Select input signal from AV1, AV2, S-Video or VGA (PC).

POWER: Monitor power ON / OFF. At OFF mode, monitor will be at standby status.
Green Light: ON Mode
Orange Light: Power Saving (Refer to not below)
Red Light: OFF Mode

Note: 1. AV1, AV2, S-Video: When there is no input signal, LCD monitor will into Power Saving mode after 60 seconds.
2. VGA: When there is no input signal, LCD monitor will into power saving mode after 5 seconds.
3. PIP: When there is no signal on both input sources, LCD monitor will into Power Saving mode after 120 seconds.

Remote Control

Key Function

Power	Turn ON / OFF monitor. At OFF mode monitor will be standby status.
CCD/VIDEO	Select CCD mode or Video mode in AV Input source.
PIP ZOOM	1.PIP mode on/off 2.Select PIP size of picture.
PIP SOURCE	Select PIP input source
PIP SWITCH	PIP source switching.
AV1	Select display to Video1.
AV2	Select display to Video2.
S-VIDEO	Select display to S-Video.
VGA	Select Display to VGA.
DVI	Select display to DVI. (Optional function by monitor)
YPbPr	Select display to YPbPr. (Optional function by monitor)

Remote Control

MUTE	The button controls audio volume to mute.
VOLUME	Used adjust +/- to increase / decrease volume.. **+** Increase volume value **-** Decrease volume value
Display	Displays video source title.
AUDIO	PIP audio source switch.
ENTER	1. Enter a selected Item of Menu. 2. Execute item function.
▲ / ▼/ ◀ / ▶	Move selected Item of the Menu.
▲ / ▼	Adjust value of the selected Item.
MENU	1.OSD Menu on / off. 2. Return Main Menu 3. Exit a selected Menu / Item.
SCALE MODE	Select size of picture.
VGA AUTO	Auto adjustment function.

General Setup

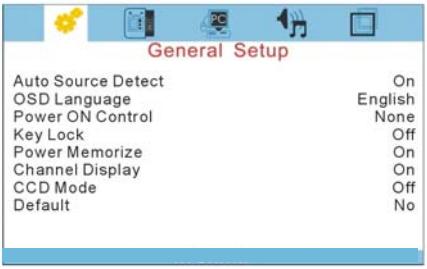

Auto Source Detect : The monitor will auto detect the video source when power ON.

OSD Language : Multi-Language selection in English.

Power ON Control : This function is to assign a specific video signal when power ON.

Key Lock : The Key-Lock function is provided to prevent tempering.
To release key lock function press **AUTO** and **DOWN**

Power Memorize : This function enable the monitor to memorize the previous power status before power break.

Channel Display : This function is to allow the channel title to be displayed on the monitor.

CCD Mode: If video signal source directly comes from CCD camera, using CCD Mode is suggested to obtain better picture performance.

Default : Return to factory default value.

Video Setup

Brightness : Adjusts the overall picture shade and brightness.

Contrast : Permits adjustment of contrast between light and dark areas of the picture.

Color : Adds coloring to the black and white picture content (of a color signal), and is usually set for viewer's preference in color saturation.

TINT : Adjusts all the colors on the screen, but is most noticeable to the eye in reds and yellows, and is also usually set for pleasing face tones.

Sharpness : Sets the desired sharpening enhancement to the picture.

Color Temperature : Selects color temperature of either 6500°K or 9300°K.

Scale Mode : Selection of picture size.

H-position : Allows adjustment for horizontal position.

V-position : Allows adjustment for vertical position.

AGC Control : This function provides a small scale of backlight enhancement to compensate the insufficient luminance.

Default : Return to factory default value.

VGA Setup

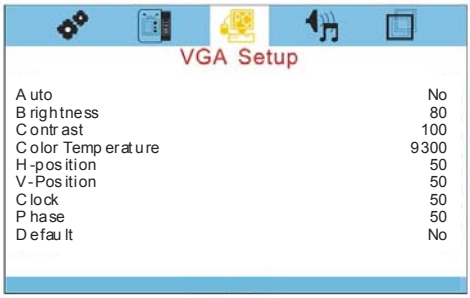

Auto : Auto detect screen detail data such as clock and phase.

Brightness : Adjusts the overall picture shade and brightness.

Contrast : Permits adjustment of contrast between light and dark areas of the picture.

Color Temperature : Selects color temperature of either 6500°K or 9300°K.

H-position : Allows adjustment for horizontal position.

V-position : Allows adjustment for vertical position.

Clock : Is used to adjust best picture quality. It adjusts the numbers of the pixel clock across one line time. Therefore it can affect the picture position and size.
Note: improper adjustment will caused image failure.

Phase : Is used to adjust best picture quality. It adjusts the sampling phase across one pixel time. When the phase is not adjusted properly, the picture will be unclear. Therefore this value should be carefully adjusted.
Note: improper adjustment will cause image failure.

Default : Sets monitor to the original factory setting.

Audio Setup

Volume : Controls built-in speakers' output volumes

Mute : To disable the audio function. To enable, press MUTE again.

Default : Sets AUDIO settings to the original factory setting.

PIP Setup

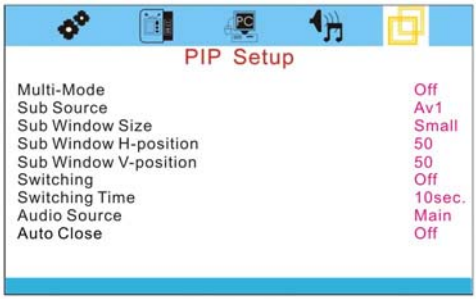

Multi-Mode : This function allow the PIP mode to be selected.

Sub Source : The function allow the PIP Sub source to be selected.

Sub Window Size: The selection of PIP window size.

Sub Window H-Position : Control the PIP window position in horizontal position.

Sub Window V-Position : Control the PIP window position in vertical position.

Switching : Enable PIP sources switching.

Switching Time : Control PIP source switching time.

Audio Source: Select PIP mode audio source.

Auto Close : Detect PIP mode signal.

**** PIP Hotkey: Auto + Menu***

LCD monitor Mounting Guide

Desktop
Adjust the viewing angle of LCD to fit most comfortable monitoring status.

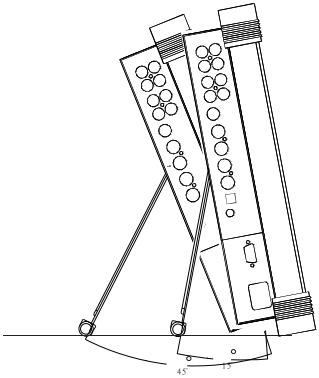

Arm Mount (VESA Standard)
When adjusting the VESA Standard Arms to the back side of the LCD monitor, please use the 4x8(mm) screw.
For further information's please refer to the Arm Manual.

Mounting the monitor on the rack

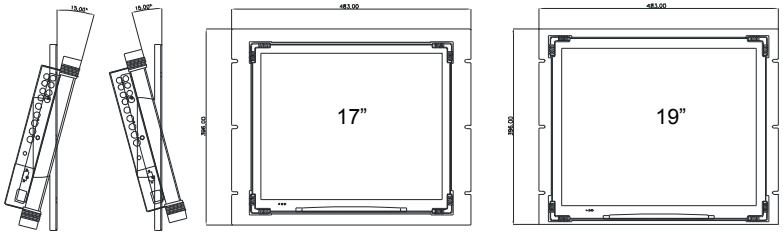

Note:
When adjusting to a rack, you will need to use an optional rack mount to the back side of the LCD monitor.

Troubleshooting

Before calling a service technician, please check the following table for a possible cause of the problem and some solution.

Symptom	**Solution**
Monitor will not turn on	●Make sure the power cord is plugged in, then press POWER button.
No picture, no sound	●Check cable connections.
No sound, picture OK	●Check audio Cable Connections ●Try pressing Volume up button in the Menu.
Poor color, sound OK	●Check cable connections ●Adjust Video set up menu.
Poor color or no color	●Adjust Color and / or TINT (NTSC only)

LCD Color Monitor Specification

Model Number		17”	19”
Panel Size		17.0”	19.0”
Aspect Ratio		5:4	5:4
Resolution / Scan		640 x 480 @ 60/72/75	640 x 480 @ 60/72/75
		800 x 600 @ 56/60/72/75	800 x 600 @ 56/60/72/75
		1024 x 768 @ 60/70/75	1024 x 768 @ 60/70/75
		1280 x 1024 @ 60/75	1280 x 1024 @ 60/75
Brightness		300cd/m^2 (*1)	270cd/m^2 (*1)
Viewing Angle(H/V)		Left 85°/ Right 85° / Up 85° / Down 85°	Left 80°/ Right 80° / Up 75° / Down 60°
Response Time		8ms(Typ)	8ms(Typ)
Sync. Format		NTSC / PAL	
Frequency (Horizontal)		PC: 31.5K - 80KHz, Video 15750 / 15625Hz (NTSC / PAL) (*2)	
Frequency (Vertical)		PC: 56Hz -75Hz, Video: 50 / 60Hz (*2)	
Input Interfaces	Video Interface	D-SUB 15IN x 1, Video In x 2 (BNC), Video Out x 2 (BNC), S-Video In x 1	
	Audio Interface	Audio In x 2, Audio Out x 2, PC-Audio In x 1	
	Input Power	AC In x 1	
	Termination	75ohm (Auto Termination)	
Built-in Speakers		Yes (2pcs)	
Front Panel Button		Power, Source, Up, Down, Menu, Auto	
OSD Language		Multi Language	
VESA Mounting		VESA 100	
Weight (N.W./G.W.)		7.0kg / 8.3kg	7.85kg / 9.1kg
External Dimensions (WxHxD)		378.4x331.2x81.8 mm	442.6x363.8x81.8 mm
Safety & EMI		UL, CUL, FCC, CE	
Power		AC 100-240V 50/60Hz	
Power Consumption (max)		40W	45W
Temp (Oper.)		-10°C to 50°C (14°F ~122°F)	
Humidity		20% ~ 80%	
Accessories		Power cord, User Manual	

(*1) The brightness spec. Is from panel spec.
Design and Specifications are subject to change without notice.
(*2) It is not guaranteed for all the specified range.

LCD Color Monitor Dimensions